

Intelligent Glossmeter



This versatile glossmeter covers a wide range of applications from matt to high gloss measurements conforming to International Standards. Samples can be measured separately at each angle or at 2 or 3 angles simultaneously and effectively processed using the powerful built-in software.

Available in 3 models – (60°), (20°/60°) and (20°/60°/85°) Please see table on following page for full specifications

Key Features

Relevant standards: ASTM D 523; D2457; DIN 67530; ISO 2813; ISO 7668; JIS Z 8741; BS3900; BS 6161

Automatic Calibration

Simultaneous display 20°/60°/85°-for high gloss to matte coatings

Interface: Serial RS 232

Software: GLOSS software included

Memory: 10000 measurements or 999 data groups

Power Supply: Single AA battery


Comes With: Holder; Glossmeter Software; Cable for PC Serial port; USB Adapter; User Manual; Carrying Bag

Ascott Analytical Equipment Limited

6-8 Gerard, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UW, Great Britain

T +44 (0) 1827 318040 F +44 (0) 1827 318049 E sales@ascott-analytical.com W www.ascottshop.com

Product Code	T01-21014	T01-21015	T01-21004
Description	Intelligent Glossmeter (60°)	Intelligent Dual Glossmeter/Haze Glossmeter (20°/60°)	Intelligent Tri Glossmeter (20°/60°/85°)
Measuring Range	0~199.9~2,000.0 GU	0~199.9~2,000.0 GU	0~199.9~2,000.0 GU
Measuring Area	9mm×10mm	9×10mm;9×16mm	9×10mm; 9×16mm; 5×39mm
Dimensions	155mm×48mm×75 mm	155mm×48mm×75 mm	155mm×48mm×75 mm
Weight	400 g	400 g	400 g

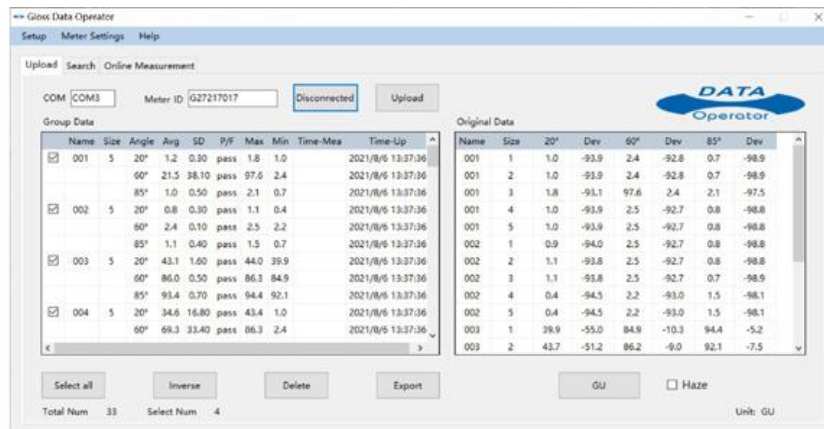

Software Included (all models)